




FASTENING SOLUTIONS FOR
THE PERSONAL CARE MARKET



- › Excellent convertibility on diaper lines
- › Soft touch and skin friendly
- › Ensure a secure and comfortable fit of diapers
- › Color and breathable options on request

SOFTFIT

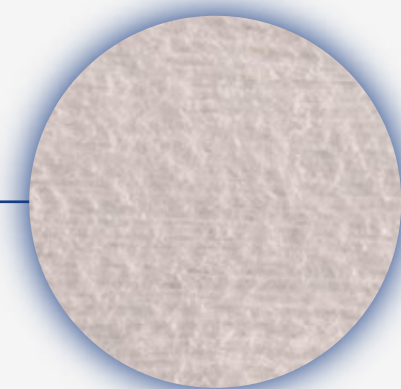

SoftFit
by APLIX®

parafix
MEMBER OF APLIX GROUP

SoftFit
by APLIX®

EFT11A by  parafix
MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

› Description


- An activated laminate of two strips of elastic film between two layers of soft nonwoven for use in stretch diaper ears/side panels.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.
- Standard color : white (other colors upon request).

› Technical characteristics

- Basis weight : 120 gsm.
- Standard widths available : 70, 120, 140, 150, 160 and 180 mm
- For other widths : please consult us.
- Nonwovens: Spunlace (50% PET/50% PP).

Properties in Cross Direction	Typical Values*
Peak Load	> 35 N
Elongation at 10 N	> 90%
Percent Set after cycle of 10 N Elongation	≤ 40 %
Tpeel nonwoven/film	> 0,75 N

The above values are obtained using our test methods.

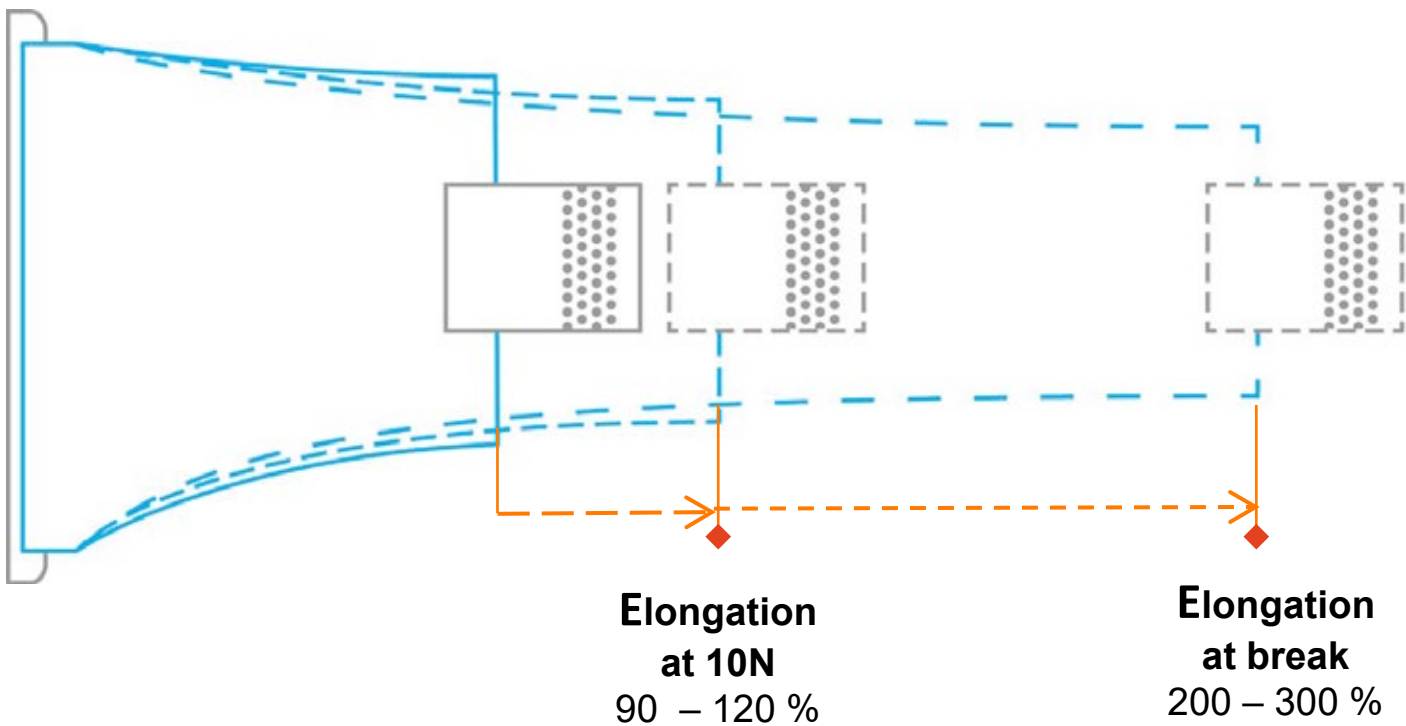

› Packaging

- Roll diameter : 780 – 1.200 mm.
- Roll length : 1.300 – 2.800 linear meters.
- Core diameter: 6".
- For other dimensions: please consult us.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

The information contained in this document is for reference purposes only.
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

SoftFit
by APLIX®

EFT12A by  **parafix**
MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

› Description


- An activated laminate of two strips of elastic film between two layers of soft nonwoven for use in stretch diaper ears/side panels.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.
- Standard color: white (other colors upon request).

› Technical characteristics

- Basis weight: 100 gsm.
- Standard widths available: 70, 120, 140, 150, 160 and 180 mm
- For other widths: please consult us.
- Nonwovens: Spunlace (50% PET/50% PP) and Carded (100%PP).

Properties in Cross Direction	Typical Values*
Peak Load	> 35 N
Elongation at 10 N	> 75%
Percent Set after cycle of 10 N Elongation	≤ 40 %
Tpeel nonwoven/film	> 0,75 N

The above values are obtained using our test methods.

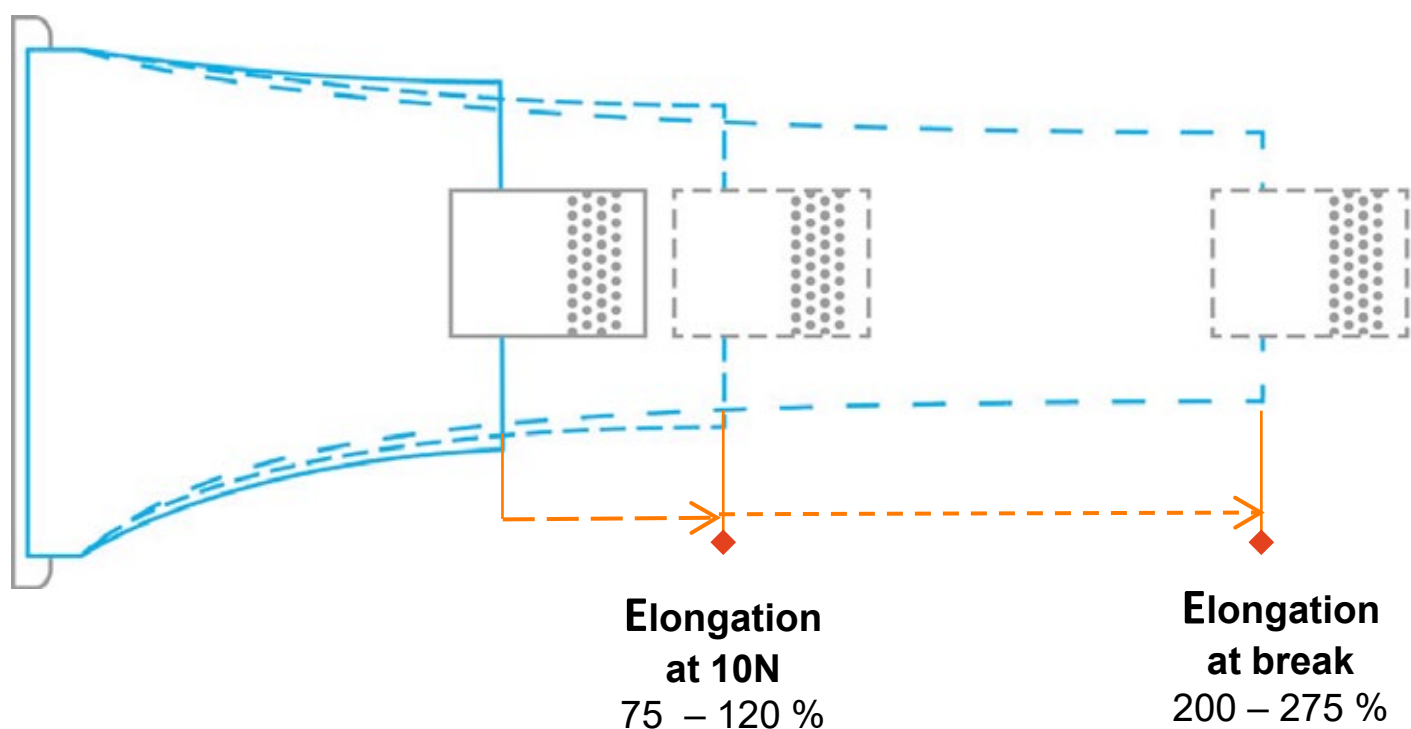

› Packaging

- Roll diameter: 700 - 1.200 mm.
- Roll length: 1.300 - 2.800 linear meters.
- Core diameter: 6".
- For other dimensions: please consult us.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

The information contained in this document is for reference purposes only.
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

FTC / HYG / aplix® HKN ADULT / 07/19/2021

SoftFit
by APLIX®

EFT13C by parafix
MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- An activated laminate of two strips of elastic film between two layers of soft nonwoven for use in stretch diaper ears/side panels.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.
- Standard color : white (other colors upon request).

> Technical characteristics


- Basis weight: 100 gsm.
- Standard widths available: 70, 120, 140, 150, 160 and 180 mm

For other widths: please consult us.

Nonwovens: Spunlace (50% PET/50% PP) and Spunbond (100%PP).

Properties in Cross Direction	Typical Values*
Peak Load	> 35 N
Elongation at 10 N	> 75%
Percent Set after cycle of 10 N Elongation	≤ 40 %
Tpeel nonwoven/film	> 0,75 N

The above values are obtained using our test methods.

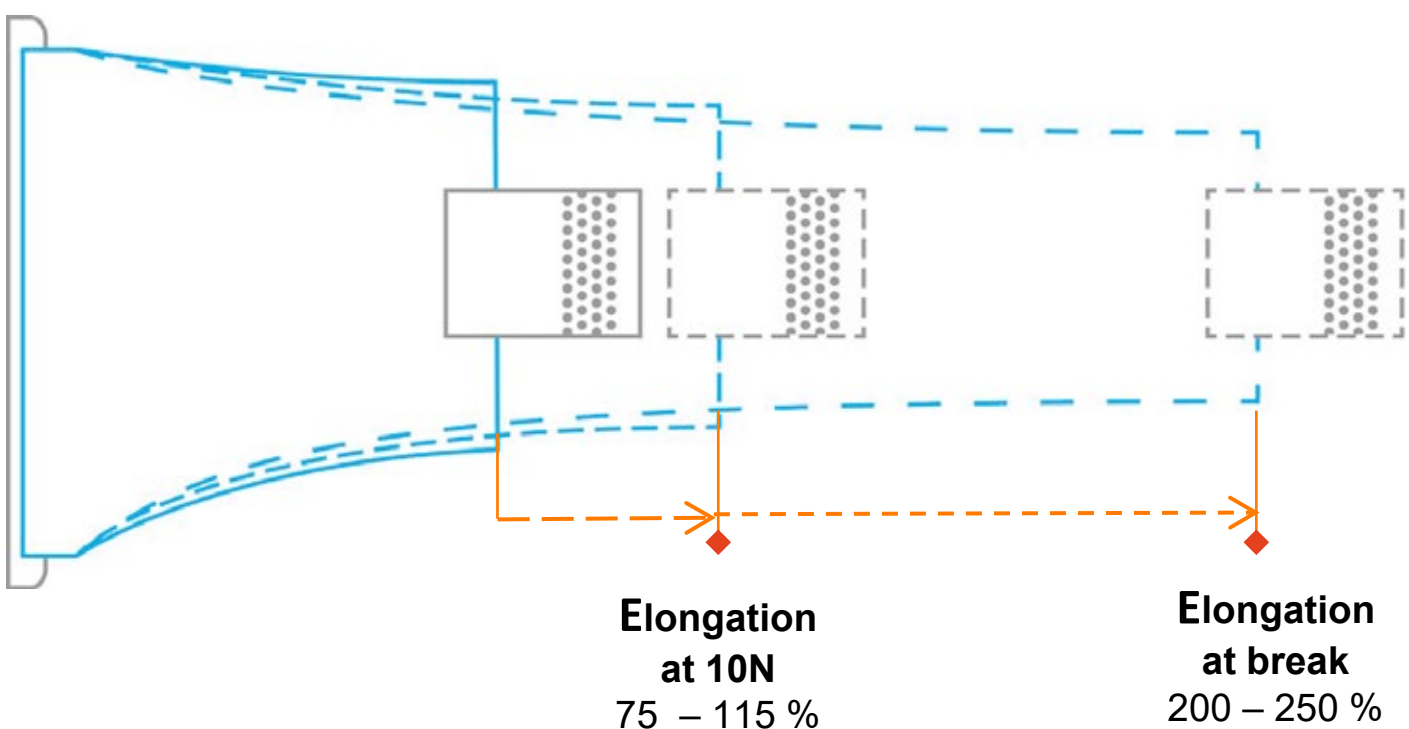

> Packaging

- Roll diameter : 780 – 1.200 mm.
- Roll length : 1.300 – 2.800 linear meters.
- Core diameter: 6".
- For other dimensions: please consult us.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

The information contained in this document is for reference purposes only.
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

FTC / HYG / aplix® HKN ADULT / 07/19/2021

SoftFit
by APLIX®

EFT23C by  parafix
MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

> Description


- An activated laminate of two strips of elastic film between two layers of soft nonwoven for use in stretch diaper ears/side panels.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.
- Standard color: white (other colors upon request).

> Technical characteristics

- Basis weight: 95 gsm.
- Standard widths available: 70, 120, 140, 150, 160 and 180 mm
- For other widths: please consult us.
- Nonwovens: Spunbond (100% PP) and Carded (100% PP).

Properties in Cross Direction	Typical Values*
Peak Load	> 32 N
Elongation at 10 N	> 60%
Percent Set after cycle of 10 N Elongation	≤ 40 %
Tpeel nonwoven/film	> 0,75 N

The above values are obtained using our test methods.

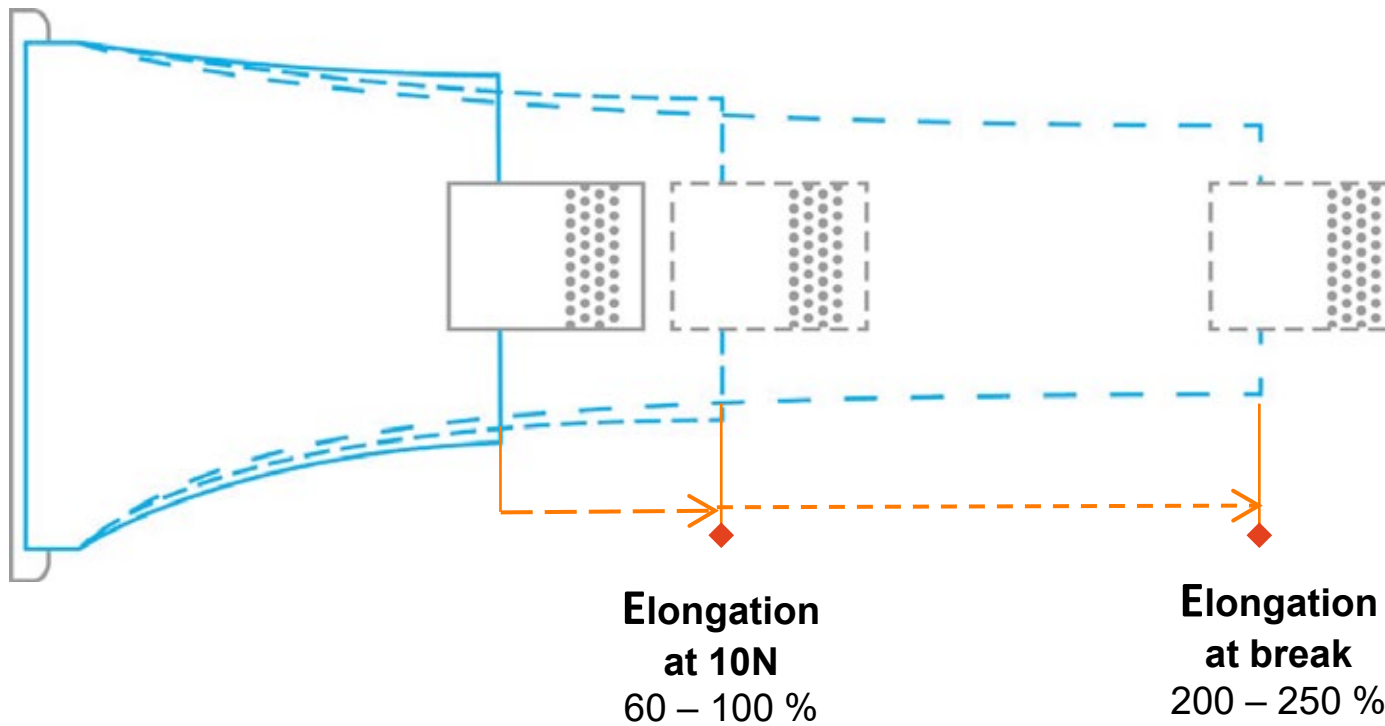

> Packaging

- Roll diameter: 780 - 1.200 mm.
- Roll length: 1.300 - 2.800 linear meters.
- Core diameter: 6".
- For other dimensions: please consult us.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

The information contained in this document is for reference purposes only.
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

Aplix® EFT

EFT33D by parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

> Description


- An activated laminate of two strips of elastic film between two layers of soft nonwoven for use in stretch diaper ears/side panels.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.
- Standard color: white (other colors upon request).

> Technical characteristics

- Basis weight: 90 gsm.
- Standard widths available: 70, 120, 140, 150, 160 and 180 mm
- For other widths: please consult us.
- Nonwovens: Spunbond.

Properties in Cross Direction	Typical Values*
Peak Load	> 32 N
Elongation at 10 N	> 50%
Percent Set after cycle of 10 N Elongation	≤40 %
Tpeel nonwoven/film	> 0,75 N

The above values are obtained using our test methods.

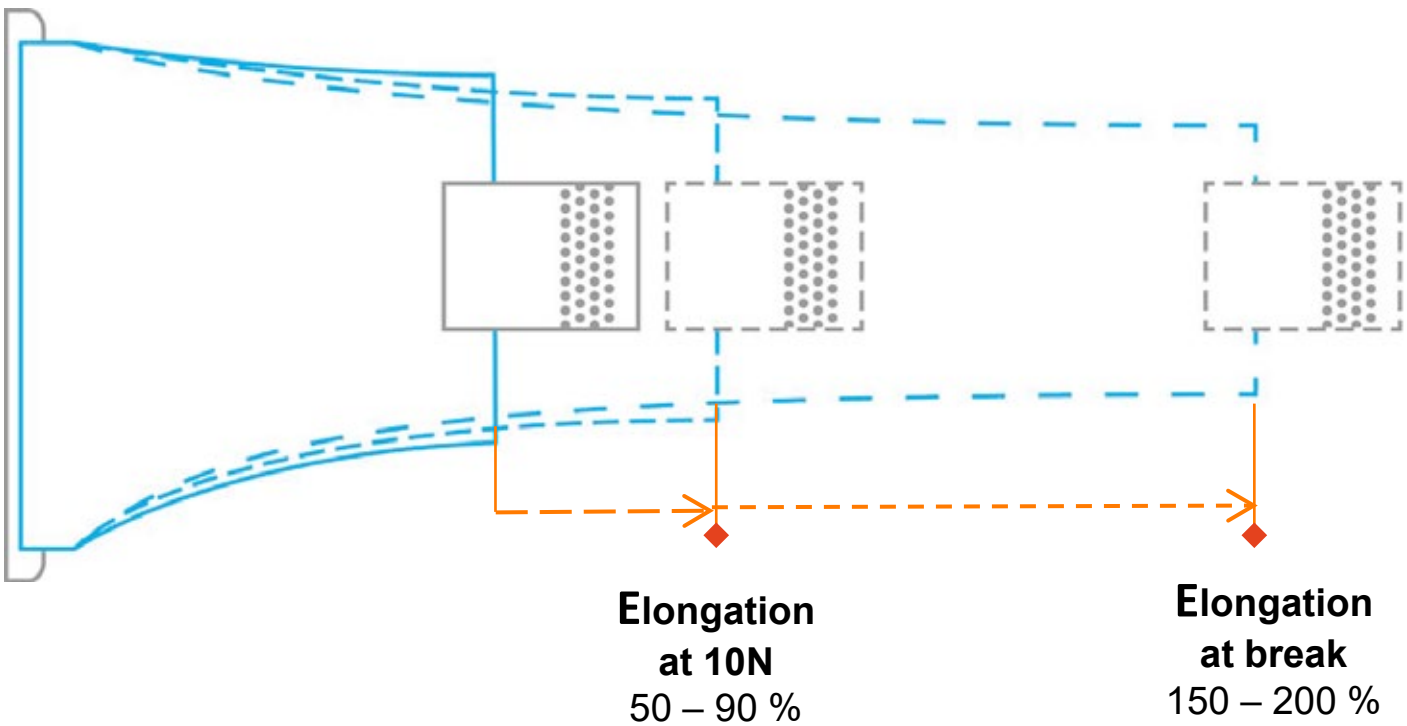

> Packaging


- Roll diameter: 750 - 1.200 mm.
- Roll length: 1.300 - 2.800 linear meters.
- Core diameter: 6".
- For other dimensions: please consult us.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

The information contained in this document is for reference purposes only.
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**



PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

FTC / HYG / aplix® HKN ADULT / 07/19/2021

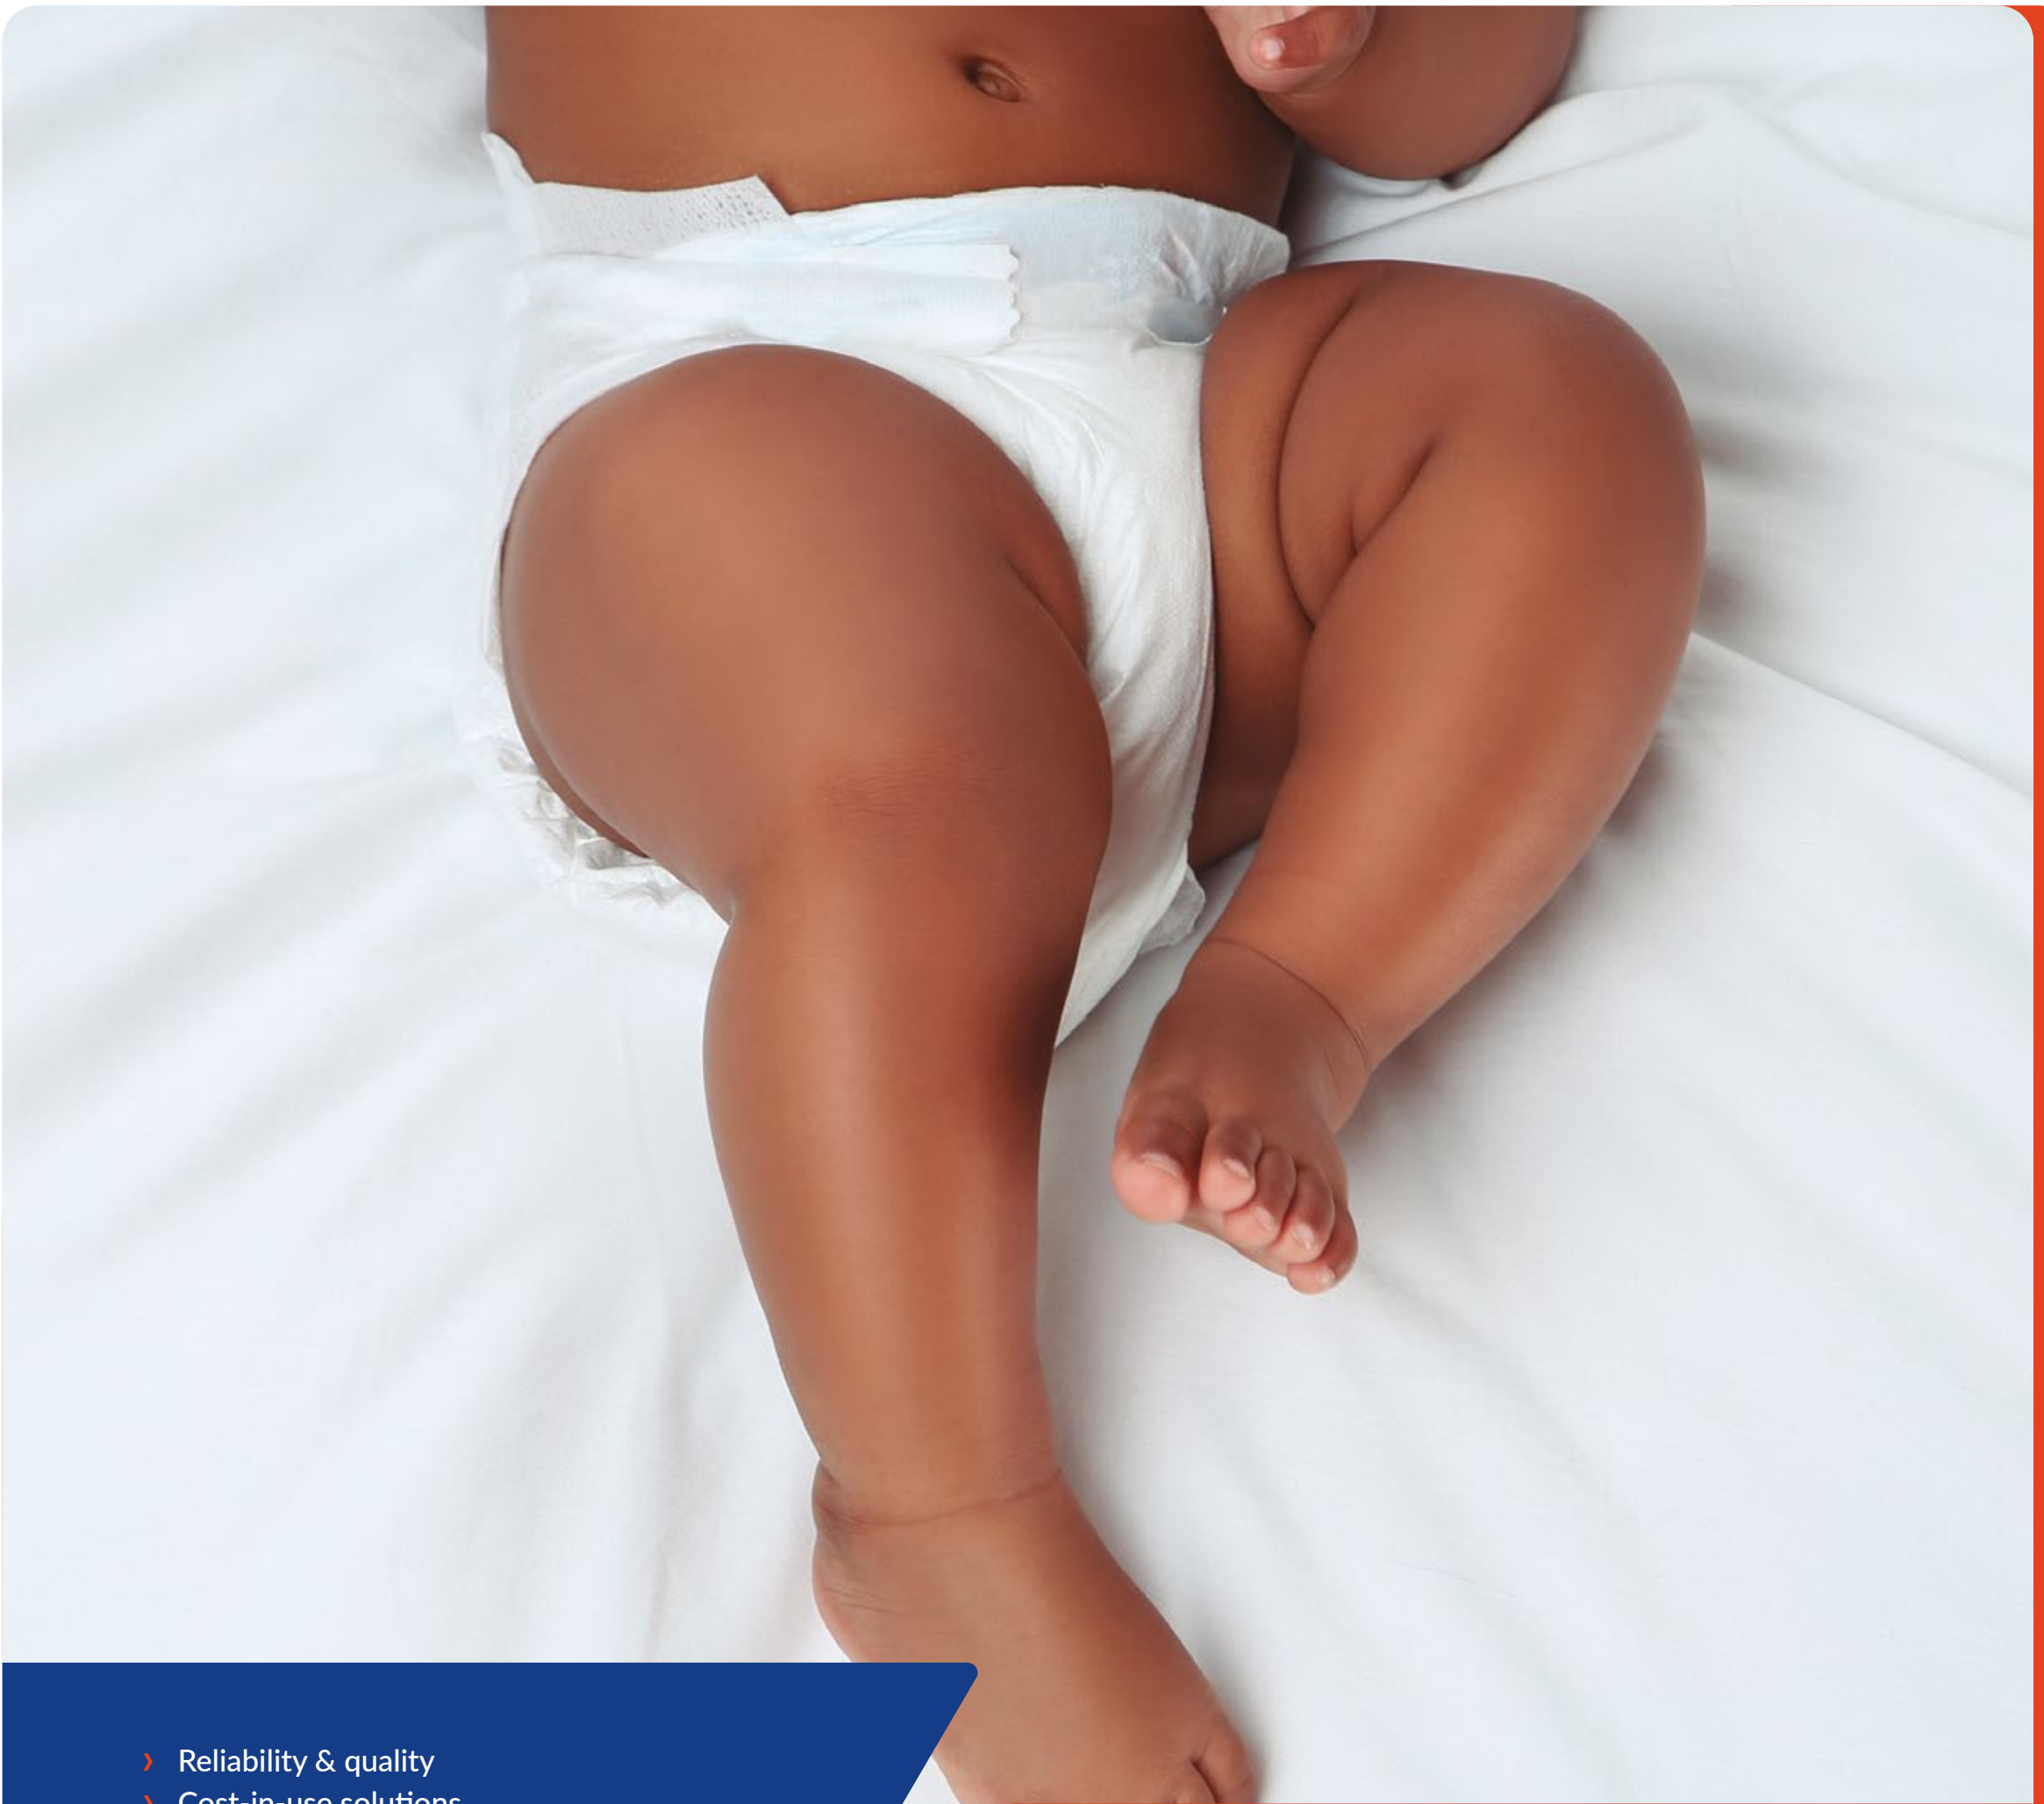

- › Reliability & quality
- › Cost-in-use solutions
- › Customization (widths, colors, hook shape, patch...)

SOFTGRIP

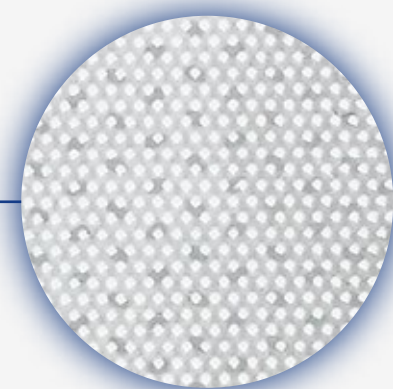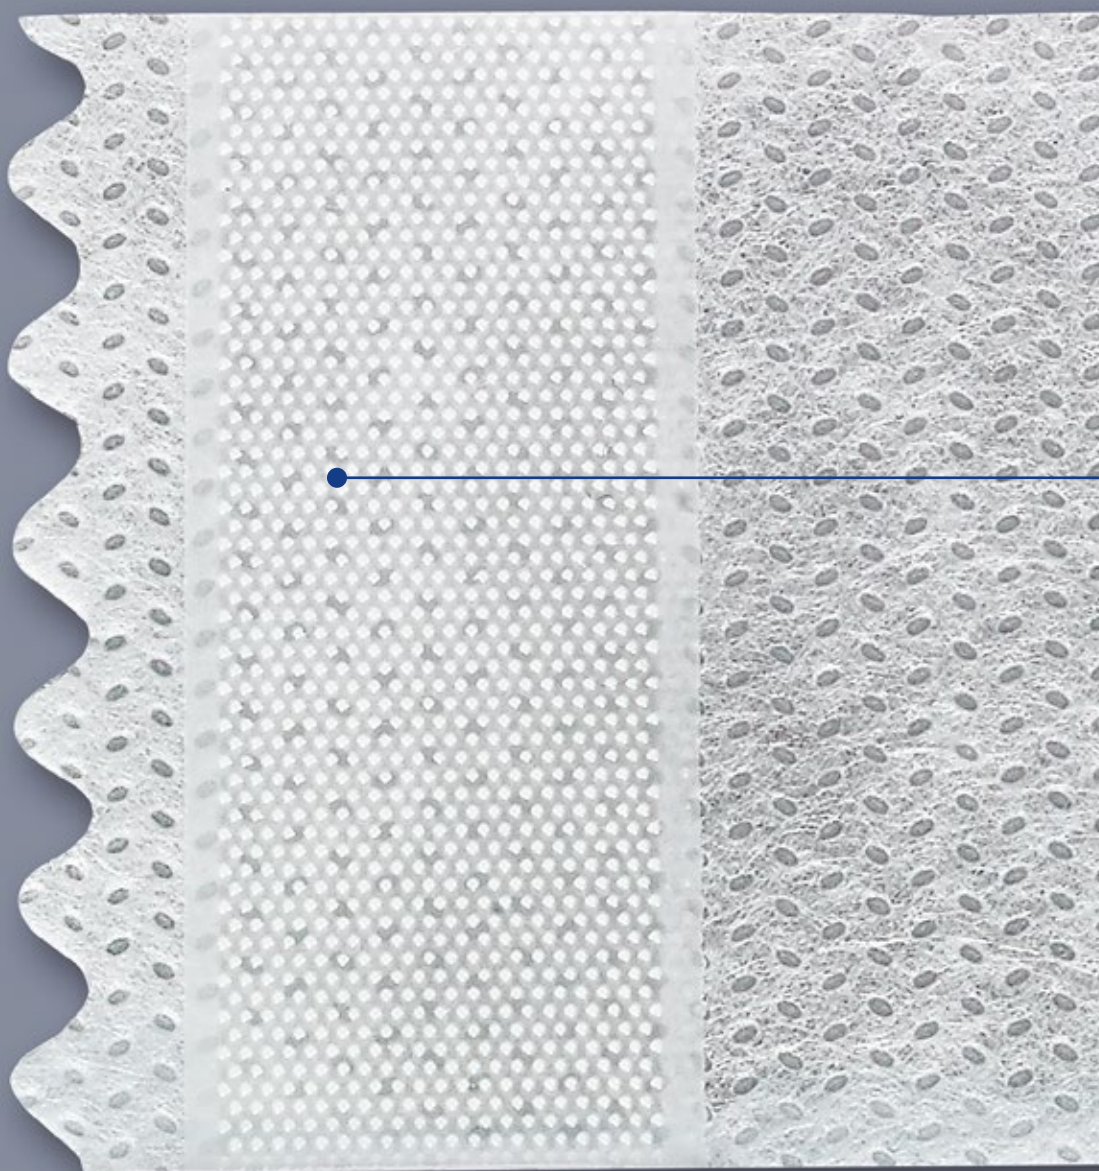

SoftGrip
by APLIX®

 **parafix**
MEMBER OF APLIX GROUP

SoftGrip

by APLIX®

HKN STRETCH SOFTGRIP

Y Bond by

parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- Y-bond hook tape with elastic zone and nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Options for combination with frontal tape.
- Wavy or straight cut.

> Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Dynamic Shear (Kgf/25 mm)	≥ 3

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
HKN STR SOFTGRIP	45 – 60 mm	15 mm 20 mm	175 - 210 gsm

Combinations tape under verification. Tolerance +/- 2 mm.
Recommended 25 mm cut for attachment on Frontal Tape.

YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

> Packaging

Model	Box dimensions Length x Width x Height in mm	Lenght	Rolls
HKN STR	500 x 500 x 225 mm	300 m	64 rolls with 15 sqm

Others models and lenghts upon request

- Roll with 300 meters - Maximum roll diameter 480 mm with 3" (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

SoftGrip

by APLIX®

MONO HKN SOFTGRIP AD

L Bond by

parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

» Description

- L-bond hook tape with nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Widths: 45 - 60 mm.
- Standard color: white (other colors upon request).
- Option for combination with frontal tape.
- Central hook or in parallel strips.

» Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Shear (kgf/25 mm)	≥ 3

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
MONO HKN SOFTGRIP AD	45 - 60 mm	15 mm 20 mm	75 - 110 gsm

Combinations tape under verification. Tolerance +/- 2 mm.

Recommended 25 mm cut for attachment on Frontal Tape.

YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

» Packaging

Model	Box dimensions Length x Width x Height in mm	Length	Rolls
MONO HKN 50	500x500x225 mm	300 m	64 rolls with 15 sqm
MONO HKN 50	585x585x225 mm	450 m	64 rolls with 22,5 sqm
MONO HKN 50 SPOOLING	400x390x400 mm	1860 m	12 spools with 93 sqm

- Roll with 300 meters - Maximum roll diameter 450 mm with 3" (76 mm) core size.
- Roll with 450 meters - Maximum roll diameter 550 mm with 3" (76 mm) core size.
- Roll with 1860 meters - Maximum roll diameter 470 mm with 6" (152 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

SoftGrip

by APLIX®

MONO HKN SOFTGRIP

L Bond by

parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- L-bond hook tape with nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Widths: 70 - 160 mm (other widths upon request).
- Standard color: white ad green (other colors upon request).
- Option for combination with frontal tape.
- Central hook or in parallel strips.

> Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Dynamic Shear (kgf/25 mm)	≥ 3

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
MONO HKN SOFTGRIP WHITE MONO HKN SOFTGRIP COLORFUL	70 – 160 mm	15 mm 20 mm 25 mm 30 mm	62 - 80 gsm

Combinations tape under verification. Tolerance +/- 2 mm.
Recommended 25 mm cut for attachment on Frontal Tape.

> Packaging

Model	Box dimensions Length x Width x Height in mm	Length	Rolls
MONO HKN 100	695x695x1020 mm	610 m	10 rolls with 61 sqm

Others models and lenghts upon request

- Roll with 610 meters - Maximum roll diameter 680 mm with 3" (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br



****PATENT REQUIRED**

» Description

- Y-bond hook tape with nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Options for combination with frontal tape.
- With or without finger lift
- Wavy or straight cut.

» Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Dynamic Shear (Kgf/25 mm)	≥ 3

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
HKN SOFTGRIP	45 – 60 mm	15 mm 20 mm	125 - 150 gsm

Combinations tape under verification. Tolerance +/- 2 mm.
Recommended 25 mm cut for attachment on Frontal Tape.

» Packaging

Model	Box dimensions Length x Width x Height in mm	Lenght	Rolls
HKN 50	500x500x225 mm	300 m	64 rolls with 15 sqm
HKN 50	585x585x225 mm	450 m	64 rolls with 22,5 sqm

Others models and lenghts upon request

- Roll with 300 meters - Maximum roll diameter 480 mm with 3" (76 mm) core size.
- Roll with 450 meters - Maximum roll diameter 570 mm with 3" (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

SoftGrip

by APLIX®

Cross Over



APLIX INNOVATIVE FASTENING SOLUTIONS

Description

- Overlap closure system
- L-bond hook tape laminated on NW Loop backside.
- On line hook lamination without glue.
- Standard widths available from 30 mm to 150 mm
- Central hook or parallel strips.

Key benefits

- Ideal for premature nappies
- Sustainability (no glue, 100% PP)
- Soft, flexible and friendly hook tape
- Customization (width, color, strips, patch, NW base...)
- Odorless

Technical characteristics

Counterpart	Target PEEL Strength* N	Dynamic SHEAR* N
SoftLoop Mainline Frontal Tape	4 - 6	40 - 60
SoftLoop Premium Frontal Tape	5 - 7	50 - 70

Counterpart	Target PEEL Strength* N	Dynamic SHEAR* N
Non-woven Loop backside	2 - 3	30 - 50

Depending on test methods used.

Model	Fastening Tape	Hook	Weight
MONOLAYER	30 mm ↓ 150 mm	10 mm ↓ 30 mm	80 – 110 gsm

Packaging

- Packaging in pancake or spool.
- For pancake: maximum roll diameter 1200 mm.

Storage, shelf life and disposal

- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity and extreme temperatures.
- Recyclable product.
- Disposal recommendations: the product must be entrusted to a waste processing company.



**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

**For Europe
Middle East,
& Africa**
APLIX S.A.
+33 (0)2 28 22 00 80

For North America
APLIX Inc
+(1) 704 588 1920

For South America
PARAFIX Ltda.
+55 (19) 3881 7199


For Asia
APLIX (Shanghai)
Fasteners Company Ltd.
+86 (021) 5986 7610

personalcare@aplix.com



- › Repositionable with high performance
- › Soft touch and smooth appearance
- › Breathable
- › Sustainable (100% PP Nonwoven)

SOFTLOOP

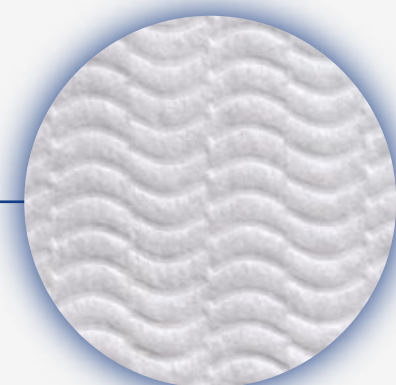

SoftLoop
by APLIX

parafix
MEMBER OF APLIX GROUP

SoftLoop

by APLIX®

TBW 10 P2 by parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

Description

- Nonwoven Frontal Tape for baby diapers. To be used in combination with mechanical fastening system.
- Developed to ensure better grip with high peel and shear performance.
- Available white, with generic or customized print up to 8 colors on request.
- TBW 10-30 can be used with various substrates including polyethylene and nonwoven back sheet.
- Standard width 150, 160, 170, 200 or 240 mm
- Weight: 37 gsm.
- Available with optical brightener.

Technical characteristics

Test	Values Hook Tape – Parafix Reference
Peel 90°	250 gf/25 mm
Dynamic Shear	4,0 kgf/25 mm

The above values are obtained using our test methods.

Packaging

Dimensions Length X Width x Height (mm)	Rolls*
500 x 500 x 225	1 roll
500 x 500 x 265	1 roll
1034 x 1034 x 945	12 – 30 rolls
730 x 730**	3 - 6 rolls
1.050 x 1.050**	3 – 30 rolls
1.200 x 1.200**	3 – 30 rolls

*Rolls quantity can vary, depending on width.

**Jumbo rolls arranged on pallet.

- Minimum roll length 700 m, maximum 4.500 m.
- Maximum roll diameter 1.050 mm with 3" (76 mm) or 6" (152 mm) core size.
- Transparent, functional, metallic and black metallic splice.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity, and extreme temperatures above 40°C.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

SoftLoop

by APLIX®

TBW 10-30 by parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

Description

- Nonwoven Frontal Tape for baby diapers. To be used in combination with mechanical fastening system.
- Developed to ensure better grip with high peel and shear performance.
- Available white, with generic or customized print up to 8 colors on request.
- TBW 10-30 can be used with various substrates including polyethylene and nonwoven back sheet.
- Standard width 150, 160, 170, 200 or 240 mm
- Weight: 31 gsm.

Technical characteristics

Test	Values Hook Tape – Parafix Reference
Peel 90°	> 200 gf/25 mm
Dynamic Shear	> 3,0 kgf/25 mm

The above values are obtained using our test methods.

Packaging

Dimensions Length X Width x Height (mm)	Rolls*
500 x 500 x 225	1 roll
500 x 500 x 265	1 roll
1034 x 1034 x 945	12 – 30 rolls
730 x 730**	3 – 6 rolls
1.050 x 1.050**	3 – 30 rolls
1.200 x 1.200**	3 – 30 rolls

*Rolls quantity can vary, depending on width.

**Jumbo rolls arranged on pallet.

- Minimum roll length 700 m, maximum 4.500 m.
- Maximum roll diameter 1.050 mm with 3" (76 mm) or 6" (152 mm) core size.
- Transparent, functional, metallic and black metallic splice.
- Shelf life: 12 months when stored in original packaging, away from sunlight, humidity, and extreme temperatures above 40°C.


**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br



- › Adhesive tapes for closing and disposing of diapers
- › Adhesive tapes for the adult segment
- › Possibility of customization (width, color and hooks)
- › New technologies

GENERAL




Adhesive tapes and new developments

Aplix® HKN ADULT DIAPERS

Y Bond by parafix

MEMBER OF APLIX GROUP

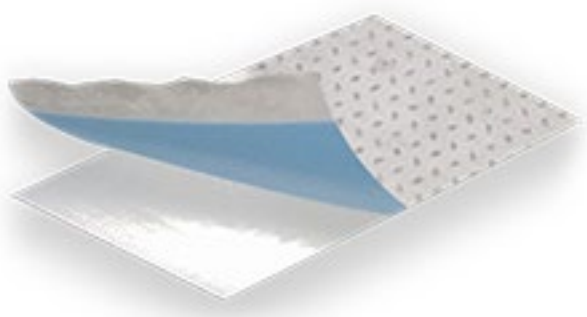

APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- Y-bond hook tape with nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Direct fixation to the NW Backsheet
- Widths: 62 mm.
- Finger lift available in transparent, white, blue, green or hook.
- Transparent or blue hook
- Wavy or straight cut with finger lift or full hook.
- Rigid or stretchable fastening tape.

> Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Soft at 37.5°C – Hook over Fastening Tape	≥ 6

The above values are obtained using our test methods.

Model	Fastening Tape	Release Tape	Hook	Finger Lift	Weight
HKNS HKNSF (All Hook)	62 mm	25 mm	20 mm	6 mm	135 – 180 g/m²

Tolerance +/- 2 mm.

> Packaging

Model	Box dimensions Length x Width x Height in mm	Rolls 330 m
HK62	500X500X265 mm	4 rolls with 20.46 sqm
	1034X1034X945 mm	52 rolls with 20.46 sqm

- Maximum roll diameter 500 mm with 3" (76mm) core size.
- Blacksplice
- Shelflife: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 35°C.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**


PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

FTC / HYG / aplix® HKN ADULT / 07/19/2021

Aplix® MONO HKN

L Bond by parafix

MEMBER OF APLIX GROUP

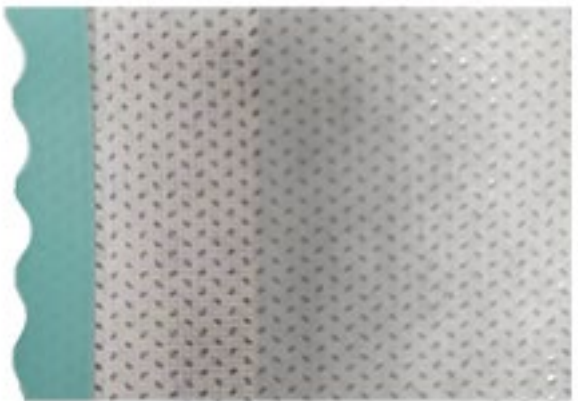

APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- L-bond hook tape with nonwoven base.
- Flexible hook developed to ensure better grip with high peel and shear performance.
- Product for glue/cut in line.
- Widths: 100 mm.
- Central hook or in strips.

> Technical characteristics

Test	Value
Peel 90° (gf/25 mm)	Frontal Tape – Parafix Reference ≥ 200
Saft at 37.5°C – Hook over Fastening Tape	≥ 6

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
MONO HKN	100 mm	20 mm 6 x 3 mm 2 x 20 mm	75 – 110 gsm

Tolerance +/- 2 mm.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

> Packaging

Model	Box dimensions Length x Width x Height in mm	Rolls 610 m
MONO HKN 100	695x695x1020 mm	10 rolls with 61 sqm

- Maximum roll diameter 680 mm with 3" (76mm) core size.
- Blacksplice
- Shelflife: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 35°C.

Aplix® BS

Y Bond by parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

› Description

- Repositionable tape in Y-bond configuration.
- Adhesive with high peel performance.
- For Frontal Tape with or without treatment.
- Widths in 50 mm or 60 mm.
- Finger Lift available in white, blue or green.
- Wavy or straight cut.
- Fastening Tape in transparent PP with or without stretch.

› Technical characteristics

Test	Value	
	BS 30*	BS 60
Peel 90° (gf/25 mm)	95 - 440	≥ 180
Release Force Fastening tape on Release Tape (gf/25 mm)	25 - 180	25 - 250

The above values are obtained using our test methods.

* Tape for adhesive frontal with treatment on the back.

Model	Fastening Tape	Release Tape	Finger Lift	Weight
BS5030 BS5060	50 mm	30 mm	6 mm	115 – 155 gsm 105 – 145 gsm

Tolerance +/- 2 mm.

› Packaging

Model	Box dimensions Length x Width x Height in mm	Rolls 750 m
BS5030/60	500 x 500 x 225 mm	4 rolls with 37.5 sqm

- Maximum roll diameter 485 mm with 3" (76 mm) core size.
- Transparent functional or black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 35°C.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**


PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

FTC / HYG / aplix® BS / 07/19/2021

Aplix® TR

Y Bond by parafix

MEMBER OF APLIX GROUP

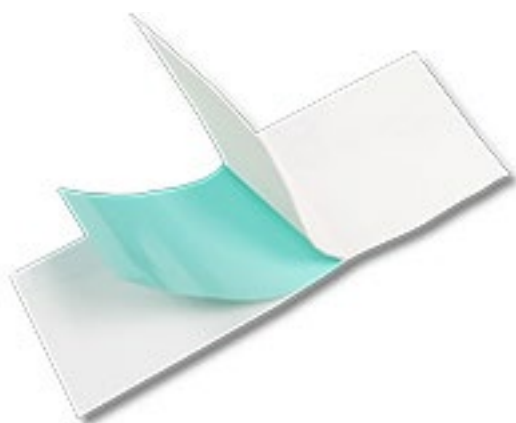

APLIX INNOVATIVE FASTENING SOLUTIONS

> Description

- Repositionable tape for adult incontinence diapers.
- Adhesive developed to ensure better closure with high performance peel.
- Widths in 52 mm, 53.5 mm, 60 mm or 62 mm.
- Target Tape available blue or green.
- Wavy or straight cut.
- Fastening Tape in white PP with or without printing.

> Technical characteristics

Test	Value
Peel 90° Fastening tape on Target Tape (gf/25 mm)	180 - 600
Release force Target Tape on release Tape (gf/25 mm)	25 - 180

The above values are obtained using our test methods.

Model	Fastening Tape	Target Tape	Release Tape	Finger Lift	Weight
TR 5331	50 mm	35 mm	32,5 mm	7 mm	160 – 200 gsm
TR 6031	55 mm	37,5 mm	35 mm		150 – 190 gsm
TR 6231	55 mm	37,5 mm	35 mm		145 – 185 gsm

Tolerance +/- 2 mm.

> Packaging

Model	Box dimensions Length x Width x Height in mm	Rolls 500 m
TR5331	500 x 500 x 265 mm	4 rolls with 26.75 sqm
TR6031		4 rolls with 30 sqm
TR6231		4 rolls with 31 sqm

- Maximum roll diameter 485 mm with 3" (76 mm) core size.
- Transparent functional or black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 35°C.

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

Aplix® Z Bond Tape

Z Bond by parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

Description

- Adhesive tape for diaper discard.
- Width: 62 mm.
- Finger lift available in white, blue and green.
- Smooth or wavy cut.
- Fastening Tape: PP white or transparent with or without printing.


Technical characteristics

Test	Value (Opening force)
Opening force 180° - FT1//FT2 (N/25 mm)	1 – 6.5
Opening force 180° - FT2//FT3 (N/25 mm)	1 – 6.5
Adhesion Strength 90° (N/25 mm)	≥8

The above values are obtained using our test methods.

Model	Fastening Tape 1	Fastening Tape 2	Fastening Tape 3	Finger Filt	Weight
Z-TAPE	55 mm	57 mm	48 mm	9 mm	255 – 295 g/m²

Tolerance +/- 2 mm.

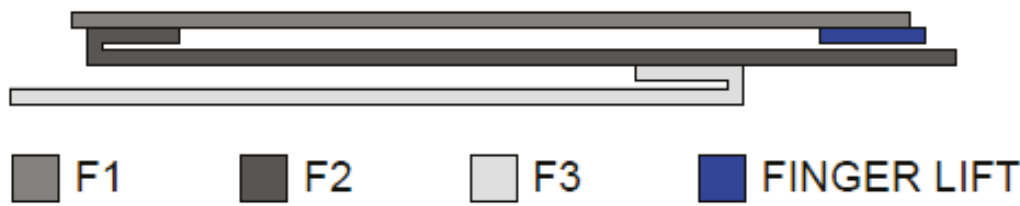

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

Packaging

Model	Box dimensions Length x Width x Height in mm	Rolls 375 m
Z-Tape 62	500 x 500 x 265 mm	4 rolls with 23,25 sqm each

- Maximum roll diameter: 500 mm with 3' (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 35°C

SoftGrip

by APLIX®

L Bond by

parafix

MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

Description

- L-bond hook tape with nonwoven base.
- SoftGrip hook developed to ensure better grip with high peel and shear performance.
- Width: 54 - 62 mm.
- Front tape color or white.
- Fastening Tape in nonwoven.
- Fastening tape options smooth or wavy.

Technical characteristics

Test	Value Frontal Tape – Parafix Reference
Peel 90° (gf/25 mm)	≥ 200
Shear (kgf/25mm)	≥ 3
Saft at 37.5°C – Hook over Fastening Tape	≥ 6
Saft at 37.5°C – Permanent part over side tab diaper (min.)	≥ 20

The above values are obtained using our test methods.

Model	Fastening Tape	Hook	Weight
SOFTLOCK	54 - 62 mm	15 mm 20mm	150 – 180 gsm

Tolerance +/- 2 mm.

Packaging

Model	Box dimensions Length x Width x Height in mm	Lenght	Rolls 280m
SOFTLOCK	500x500x265mm	280 m	4 rolls with 17,36 m²

Others models and lenghts upon request

- Maximum roll diameter: 500 mm with 3' (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C

YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br

Aplix® HOS

Hook on Stretch by  parafix
MEMBER OF APLIX GROUP



APLIX INNOVATIVE FASTENING SOLUTIONS

****Product under development**

» Description

- A laminate of two strips of elastic film between two layers of soft nonwoven with a single or double hook extruded on top for use in stretch diaper ears/tapes.
- This material gives excellent tear off resistance.
- Suitable for adhesive or thermal/pressure bonding to the diaper chassis.

» Technical characteristics

- Basis weight: 100 - 150 gsm
- Standard widths available : 140 - 180 mm with 15 - 30 mm hook (others widths upon request).

Test	Value
Peak load	> 32 N
Elongation at 10N	> 50%
Percent Set after cycle of 10N Elongation	≤40 %
Tpeel nonwoven/fim	> 0,75 N

The above values are obtained using our test methods.

» Packaging

Model	Box dimensions Length x Width x Height in mm	Length	Rolls
HOS	695x695x1020 mm	610 m	10 rolls with 61 sqm

Others models and lenghts upon request

- Roll with 610 meters - Maximum roll diameter 700 mm with 3" (76 mm) core size.
- Black splice.
- Shelf life: 12 months when stored in its original packaging, away from sunlight, humidity and extreme temperatures above 40°C.

FTC / HYG / aplix® HOS / 14/07/2021

**YOUR
CONTACT
FOR HYGIENE
FASTENING
PRODUCTS**

PARAFIX Ltda.
+55 (19) 3881 7199
Avenida das Indústrias,
1855 Distrito Industrial
Benedito Storani –
Vinhedo - SP
vendas@parafix.com.br



- > Production sites
- Sales Offices
- Agents



Scan the QR code to access our website.



OUR PRODUCTION SITES

APLIX Le Cellier - França
APLIX Charlotte - EUA
APLIX Shangai - China
PARAFIX Vinhedo - Brasil

OUR SALES OFFICES

APLIX Fasteners - Reino Unido
APLIX GmbH - Alemanha
APLAUS SRL - Itália
APLIX Ltd. - Hong Kong

APLIX Fasteners Inc. - Canadá
SKY CORP - Índia
APLIX Automotive - EUA